

12SB22C 12Volt 22Ah

Specifications

Nominal Voltage(V)	12V
--------------------	-----

Nominal Capacity

20 hour rate	(1.1A	to	10.50V)	22Ah
10 hour rate	(2.09A	to	10.50V)	20.9Ah
5 hour rate	(3.74A	to	10.20V)	18.7Ah
1 C	(22A	to	9.60V)	13.93Ah
3 C	(66A	to	9.60V)	8.8Ah

Weight	Approx. 6.45kg(14.19Lbs.)
--------	---------------------------

Internal Resistance (at 1KHz)	Approx. 10 mΩ
-------------------------------	---------------

Maximum Discharge Current for

5 seconds:	330A
------------	------

Charging Methods at 25 (77)

Cycle use:

Charging Voltage	14.4 to 15.0V
------------------	---------------

Coefficient -5.0mv/ /cell

Maximum Charging Current :	6.6A
----------------------------	------

Standby use:

Float Charging Voltage	13.50 to 13.80V
------------------------	-----------------

Coefficient -3.0mv/ /cell

Operating Temperature Range

Charge	-15 (5) to 40 (104)
--------	-----------------------

Discharge	-15 (5) to 50 (122)
-----------	-----------------------

Storage	-15 (5) to 40 (104)
---------	-----------------------

Charge Retention (shelf life) at 20 (68)

1 month	92%
---------	-----

3 month	90%
---------	-----

6 month	80%
---------	-----

Case Material	ABS
---------------	-----

(Option: UL94 HB & UL94 V-0 flame retardant)

Terminal	F8
----------	----

Description of torque value of hard ware for the terminals:



Recommended torque value M6: 5.39 N·m (55kg·cm)

Maximum allowable torque value M6: 8.82 N·m (90kg·cm)




Dimensions


mm(inch)

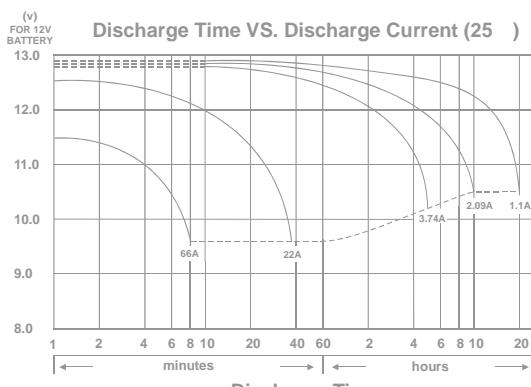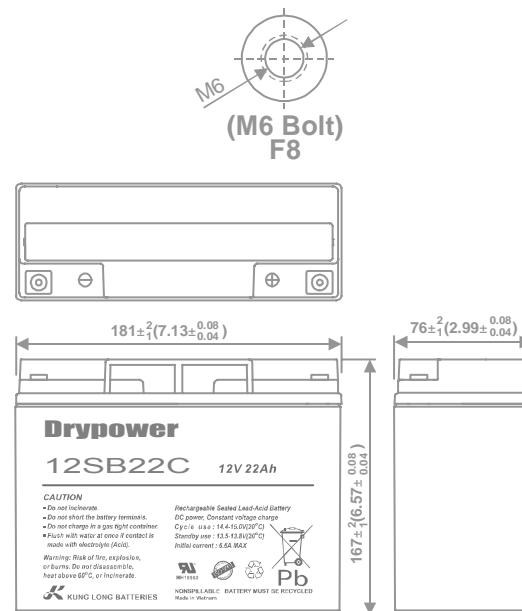


Effect of Temperature on Capacity 25 (77)

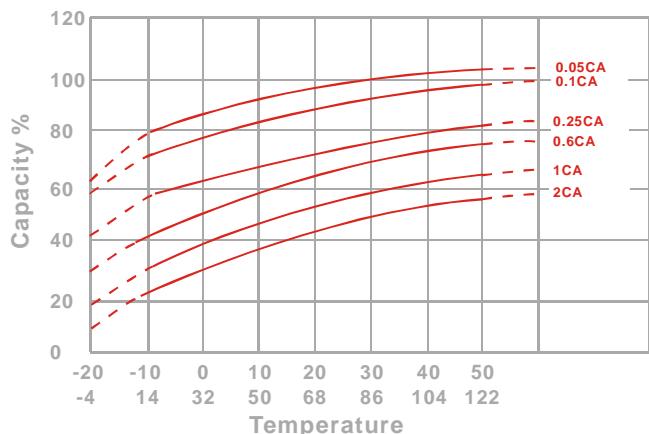

Capacity Retention Characteristic

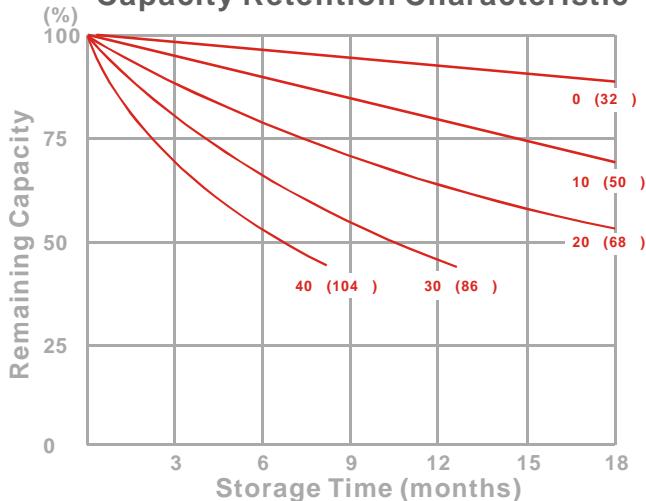

Trickle (or float) Service Life

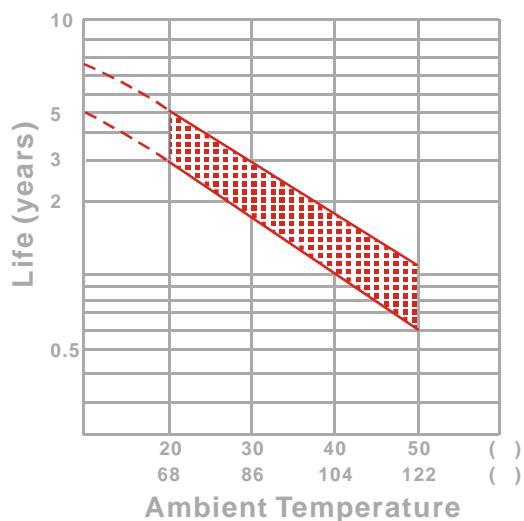

Cycle Service Life

