

12SB5C 12Volt 5Ah

Specifications

Nominal Voltage(V) 12V

Nominal Capacity

20 hour rate	(0.25A	to	10.50V)	5Ah
10 hour rate	(0.475A	to	10.50V)	4.75Ah
5 hour rate	(0.85A	to	10.20V)	4.25Ah
1 C	(5A	to	9.60V)	3.17Ah
3 C	(15A	to	9.60V)	2Ah

Weight Approx. 1.9kg(4.18Lbs.)

Internal Resistance (at 1KHz) Approx. 18 mΩ

Maximum Discharge Current for

5 seconds: 75A

Charging Methods at 25 (77)

Cycle use:

Charging Voltage 14.4 to 15.0V

Coefficient -5.0mv/ /cell

Maximum Charging Current : 1.5A

Standby use:

Float Charging Voltage 13.50 to 13.80V

Coefficient -3.0mv/ /cell

Operating Temperature Range

Charge -15 (5) to 40 (104)

Discharge -15 (5) to 50 (122)

Storage -15 (5) to 40 (104)

Charge Retention (shelf life) at 20 (68)

1 month 92%


3 month 90%

6 month 80%

Case Material




(Option: UL94 HB & UL94 V-0 flame retardant)

Terminal F1 or F2 (Faston Tab 187 or 250)

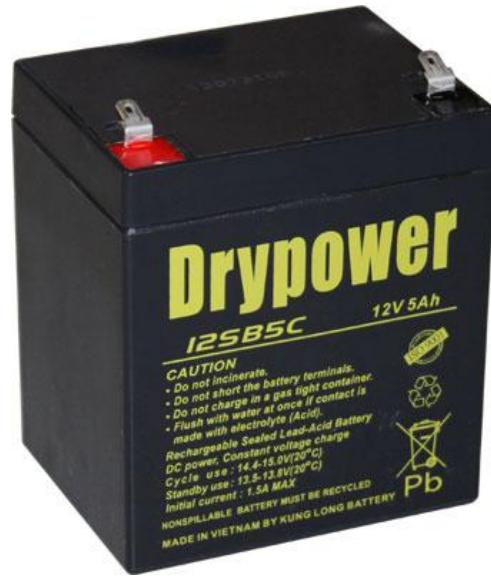


Dimensions


mm(inch)

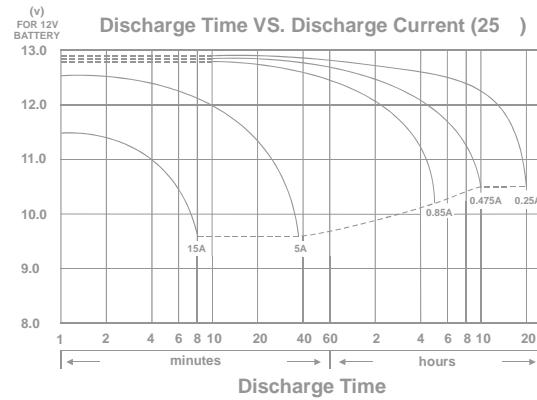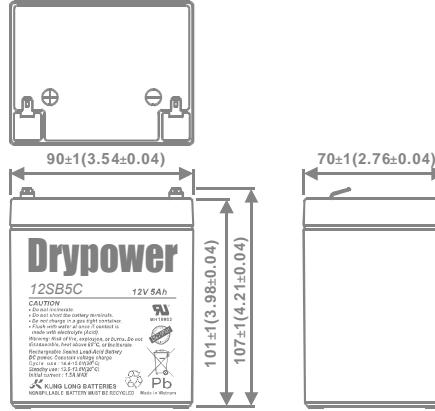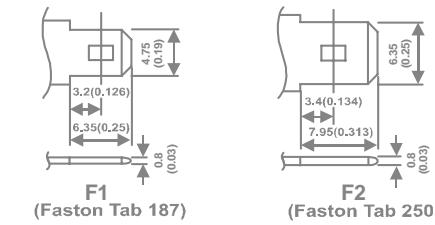


Effect of Temperature on Capacity 25 (77)

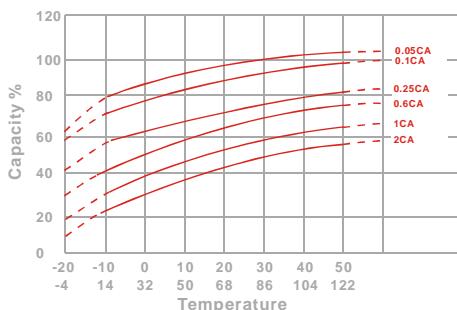

Trickle (or float) Service Life

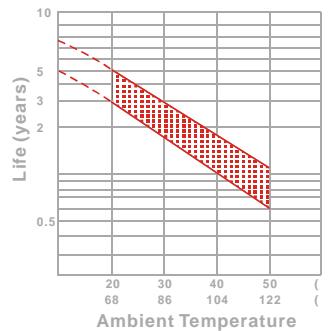

Cycle Service Life

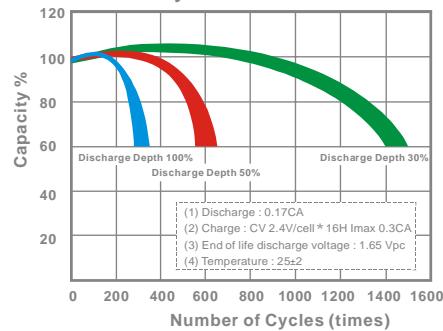

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25 (77)

Time	End Voltage	1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
		214	232	244	256	261	268	276
5	min	154	166	174	180	183	187	193
10	min	120	128	132	136	138	140	143
15	min	65.6	68.9	71.2	73.6	74.4	75.3	76.0
30	min	35.7	37.6	38.8	40.2	40.9	41.6	42.4
60	min	18.8	20.3	21.2	21.9	22.3	22.8	23.5
120	min	15.2	16.3	17.1	17.8	18.1	18.4	18.9
180	min	12.1	12.9	13.6	14.0	14.2	14.4	14.7
240	min	10.4	11.2	11.7	11.9	12.0	12.1	12.3
300	min	6.05	6.53	6.89	7.02	7.08	7.14	7.23
600	min	3.18	3.43	3.62	3.69	3.72	3.75	3.80
1200	min							

- Discharge Rates in Amperes to Various End Voltages at 25 (77)

Time	End Voltage	1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
		17.4	21.3	23.4	25.3	25.9	26.5	27.2
5	min	12.9	14.5	15.4	15.9	16.3	16.6	17.0
10	min	9.72	10.3	10.7	10.9	11.0	11.1	11.3
15	min	5.72	6.03	6.13	6.25	6.29	6.34	6.42
30	min	3.04	3.20	3.38	3.46	3.49	3.53	3.59
60	min	1.58	1.70	1.79	1.87	1.91	1.94	1.99
120	min	1.23	1.31	1.37	1.43	1.45	1.48	1.51
180	min	1.00	1.07	1.11	1.15	1.16	1.18	1.21
240	min	0.851	0.898	0.919	0.942	0.953	0.962	0.978
300	min	0.497	0.506	0.514	0.521	0.524	0.529	0.535
600	min	0.268	0.274	0.279	0.284	0.286	0.287	0.291
1200	min							

All data on the spec. sheet is an average value:

The tolerance range : X<6min(+15%~-15%), 6min X<10min(+12%~-12%), 10min X < 60min(+8% ~-8%), X 60min(+5%~-5%)